


SHARP

Be Original.

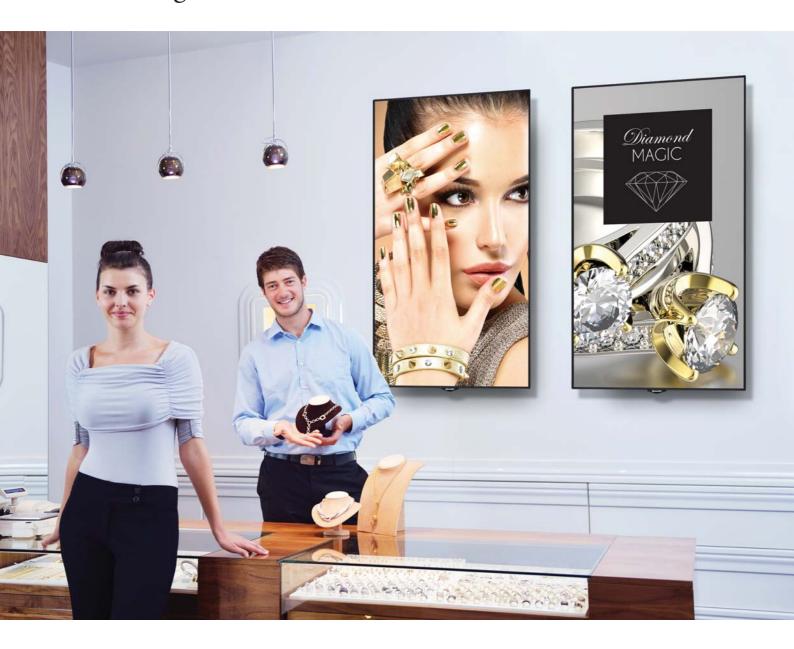

Engage Your Audience with around-the-clock Signage Solutions

The 43" Class **PN-VU431A** LCD monitor is designed for ease of use and flexibility. Ideal for well-lit environments, this LCD monitor prevents the risk of any on-screen reflections and glare. With their outstanding image quality and 24/7 operation, this monitor can deliver an extraordinary performance either in landscape or portrait orientation.



OPS Support

PN-VU series offer compliance with OPS (Open Pluggable Standard). Offering enhanced processing power, OPS gives you the freedom to choose either Windows or Android* – whichever operating system best suits your specific application.



24/7 Operation

PN-VU series are quality confirmed to operate 24 hours a day without any issues. Furthermore, these high quality screens come with brightness levels of 700 cd/ m^2 , which make them ideal for heavily lit environments.

Embedded USB Media Player

The In-Built USB Media Player allows for Picture, Audio and Video content to be played directly from a USB and HTML5 Support.

Specifications*

Model		PN-VU431A
Installation		Portrait / Landscape
LCD Panel		43-inch
	Max. Resolution	1,920 x 1,080 pixels, Full HD
	Brightness	700 cd/m ²
	Contrast Ratio	1,000:1
	Viewing Angle (H/V)	178°/178° (CR ≥ 10)
	Pixel Pitch	0.4902 mm x 0.4902 mm
	Display Colours	8bit, 16.7 M colors
	Screen Finish	Hard coating(3H), Anti-glare treatment
	Active Screen Area (W x H)	1209.60mm x 680.40mm
	Response Time	9 ms
	Backlight	Direct LED
OPS Slot		Ready
Input Terminals		HDMI 2.0 x 1 , DVI x 1 , VGA x 1, USB 2.0 x 2 , USB 3.0 x 1 , RS232C x 1, LAN x 1, IR Receiver x 1, RCA x 1, YPbPr x 1
Output Terminals		RCA L/R, 3.5 mm-diameter mini stereo jack x 1, SPDIF Coaxial
Network		RJ45
Emebedded USB Player		YES (Supports Image , Audio, Video Files)
Built-in Speaker	Output Power	10 W + 10 W
Mounting		200 x 200 mm M6
Power Supply		110V – 240V AC, 50/60 Hz 1,300mA
Power Consumption		107 W
Environmental Conditions	Operating Temperature	0°C to 40°C
Dimensions (W x D x H) (approx.) (display only)		965.50 mm X 105.80 mm X 557.30 mm
Weight (approx.)		14.5 kg
Accessories		Remote Control x 1, Remote Control Battery (AAA) x 2, IR Receiver Cable x 1, Power Cable (UK/EU) x 2, Cable management clips x 1, Wall mount adapter, Wall mount screws, VESA - bolt (M6 x 20mm) x 4, Owners Manual (English, Arabic, French, Russian), Wall mount Guide x 1

^{*} Tentative. Design and specifications are subject to change without prior notice.

Dust Proof is not available on this product

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.





